

# PN-HB108


PN-HB108 LED Highbay uses SMD LEDs and LED Driver for Industrial applications. Housing is made of die-casted aluminum with radiation fins heat-sink structure.

## Production Feature:

- High transparent toughened glass and optical grade PMMA lens.
- Hazardous free
- non-dimmable
- Directional Type
- Instant full light
- For outdoor use
- IP rating: 65
- Life-span: 50,000 hours



## " Dimensions & Light Distribution Curve "

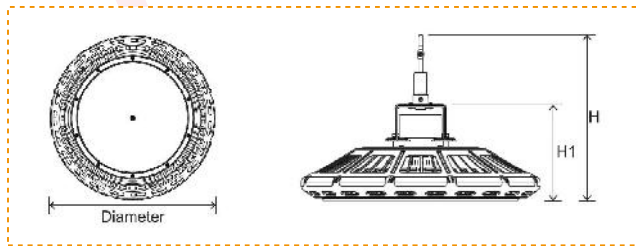

Model	Diameter	H1
PN-HB108150	360mm	143mm
PN-HB108200	400mm	143mm

## " Technical Specification "

Model	Power [W]	LED Type	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [k]	Beam angle	CRI [Ra]
PN-H108150	150	SMD	18000	120	3000 4000 6500	90°	>80
PN-HB08200	200		24000	120		90°	

## " Electrical Specification "

Rated supply voltage	90-305V
Lumen maintenance	1000H≤3%, 3000H≤1%
Frequency	50/60 Hz
Ta	-30C TO 70C
CLASS	I