


# PAN LIGHTING

## PNDL117

PANDL117 LED Downlight uses SMDs and LED Driver for indoor applications.


### Production Feature:

- High quality PS Diffuser
- LED Driver
- SMD LEDs
- Hazardous free
- Non-dimmable
- Directional Type
- Instant full light
- For indoor use
- Installation: Recessed
- IP rating: IP20
- Life-span: 50,000 hours

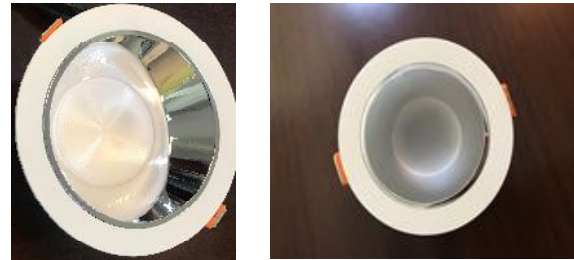

### “ Dimensions ”

Model	D	H
PNDL11710	95mm	34mm
PNDL11715	135mm	42mm
PNDL11725	195mm	62mm
PNDL11730	195mm	62mm

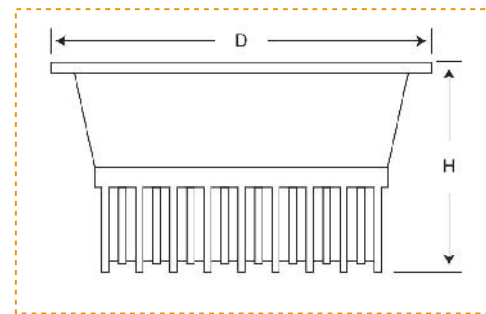

### “ Technical Specification ”

Model	Power [W]	LED Type	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [k]	Beam angle	CRI [Ra]	Cut-out [mm]
PNDL11710	10	SMD	1056	106	3000	35°	>80	77
PNDL11715	15		113					
PNDL11725	25		162					
PNDL11730	30		162					

### “ Electrical Specification ”

Rated supply voltage	220- 240V
Lumen maintenance	>80
Frequency	50/60 Hz
Ta	- 20C TO 50C
CLASS	I