

PAN LIGHTING

PNDL119

.PANDL119 LED Downlight uses SMDs and LED Driver for indoor applications


Production Feature:

- High quality PS Diffuser
- LED Driver
- SMD LEDs
- Hazardous free
- Non-dimmable
- Directional Type
- Instant full light
- For indoor use
- Installation: Recessed
- IP rating: IP20
- Life-span: 30,000 hours



“ Dimensions ”

Model	D	H
PNDL11912	145mm	75mm
PNDL11916	170mm	85mm
PNDL11920	190mm	95mm
PNDL11930	230mm	105mm

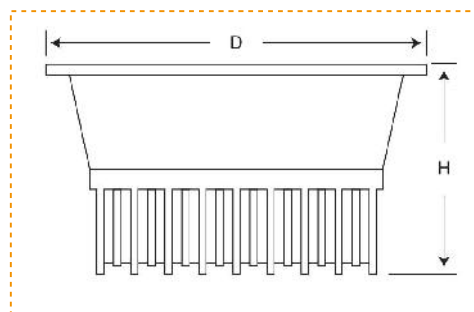

“ Technical Specification ”

Model	Power [W]	LED Type	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [k]	CRI [Ra]	Cut-out [mm]
PNDL11912	10	SMD	812	78	3000	>80	125
PNDL11916	14		1141	82	4000		150
PNDL11920	23		1904	80	6500		160
PNDL11930	27		2214	81			200

“ Electrical Specification ”

Rated supply voltage	220- 240V
Lumen maintenance	>80
Frequency	50/60 Hz
Ta	- 30C TO 70C
CLASS	I