


# PNDL126

.PANDL126 LED Downlight uses COB and LED Driver for indoor applications

## Production Feature:

- COB LEDs
- Led Driver
- High quality Reflector and glass cover
- Hazardous free
- Non-dimmable
- Directional Type
- Instant full light
- For indoor use
- Installation: Recessed mounted
- IP rating: IP20
- Life-span: 50,000 hours

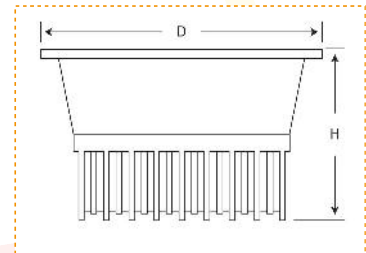

## " Dimensions & Photometric Diagram "

| Model     | D     | H     |
|-----------|-------|-------|
| PNDL12615 | 145mm | 90mm  |
| PNDL12623 | 170mm | 110mm |
| PNDL12630 | 192mm | 128mm |
| PNDL12648 | 240mm | 140mm |

## " Technical Specification "

| Model     | Power [W] | LED Type | Luminous flux [lm] | Luminous efficacy [lm/W] | CCT [k] | CRI [Ra] | Cut-out [mm] |
|-----------|-----------|----------|--------------------|--------------------------|---------|----------|--------------|
| PNDL12615 | 15        | COB      | 1681               | 115                      | 3000    | >80      | 120          |
| PNDL12620 | 23        |          | 2766               | 119                      | 4000    |          | 150          |
| PNDL12630 | 30        |          | 3300               | 110                      | 6500    |          | 170          |
| PNDL12648 | 48        |          | 5280               | 110                      |         |          | 210          |

## " Electrical Specification "

|                      |             |
|----------------------|-------------|
| Rated supply voltage | 220- 240V   |
| Lumen maintenance    | >80         |
| Frequency            | 50/60 Hz    |
| Ta                   | -30C TO 70C |
| CLASS                | I           |