

# PNDL101

LED Downlight




## Introduction

PNDL101 LED Downlight uses COB LED and LED Driver for indoor applications. Housing is made of die-cast aluminum with pearl white.

## Features

- High performance COB LEDs
- LED Driver
- Glass diffuser with high transparency rate
- High quality PC reflector
- For indoor use
- Installation: Recessed Mounted
- IP rating: IP40
- Life span: 50,000 hours

## Dimensions

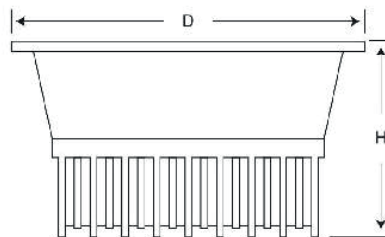

Model	PNDL101
H	64 mm
D	90 mm

# PNDL101

## LED Downlight



### Tech. Specification

Model	PNDL101
Power	6W
LED Type	COB
Luminous Flux	550 lm
Lumminous Efficacy	90
CCT	3000 k - 4000 k
CRI (Ra)	>85
Rated Supply Voltage	220-240 V
Input Voltage	100-265 VAC
Cut-Out	68 mm
Frequency	50/60 Hz

### Light Distribution

