

PNDL102

LED Downlight




Introduction

PNDL102 LED Downlight uses COB LED and LED Driver for indoor applications. Housing is made of die-cast aluminum with pear white.

Features

- High performance COB LEDs
- LED Driver
- Glass diffuser with high transparency rate
- High quality PC reflector
- For indoor use
- Installation: Recessed Mounted
- IP rating: IP40
- Life span: 50,000 hours

Dimensions

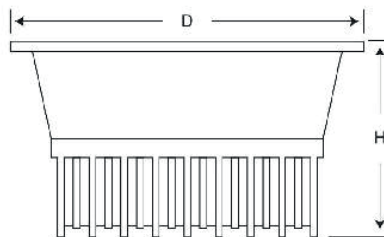

Model	PNDL 102
H	57 mm
D	83 mm

PNDL102

LED Downlight



Tech. Specification

Model	PNDL 102
Power	8W
LED Type	COB
Luminous Flux	750 lm
Lumminous Efficacy	93
CCT	3000 k - 4000 k
CRI (Ra)	>85
Rated Supply Voltage	220-240 V
Input Voltage	100-265 VAC
Cut-Out	68 mm
Frequency	50/60 Hz

Light Distribution

