



**PAN**  
LIGHTING

# PNDL 126

## LED Downlight




### Introduction

PNDL126 LED Downlight uses COB and LED Driver for indoor applications.

### Features

- High quality reflector and glass cover
- LED Driver
- COB LEDs
- Hazardous free
- Non-dimmable
- Directional type
- Instant full light
- Installation: Recessed mounted
- IP rating: IP54
- Life span: 50,000 hours

### Dimensions

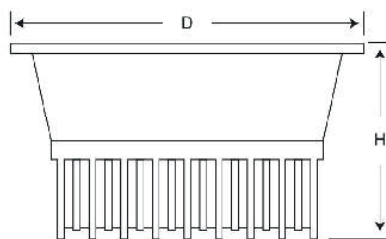

Model	PNDL126-48
H	140 mm
D	240 mm
Cut-Out	210 mm

# PNDL 126

## LED Downlight



### Tech. Specification

<b>Model</b>	<b>PNDL126-48</b>
<b>Power</b>	48W
<b>LED Type</b>	COB
<b>Luminous Flux</b>	5280 lm
<b>Lumminous Efficacy</b>	110
<b>CCT</b>	3000 k - 4000 k - 6500 k
<b>CRI (Ra)</b>	>80
<b>Rated Supply Voltage</b>	220-240 V
<b>Lumen Maintenance</b>	>80
<b>Frequency</b>	50/60 Hz
<b>Ta</b>	20C to 50C
<b>CLASS</b>	I
<b>IP Rating</b>	IP54