



PAN
LIGHTING

PNEX102

LED Emergency Light



Introduction


PNEX 102 Non maintained Emergency Light for large open area or high applications. Incorporating twin intensity LED light sources for efficient and reliable operation. PNEX 102 is suitable for Anti-Panic, Escape Route and high risk task area emergency lighting. The head being adjustable to suit the specific application. The durable IP65 housing ensures the product is protected from dust, dirt and water to offer efficient and impressive performance in challenging environments.

To control gear and battery are housed in a light weight polycarbonate IP65 enclosure allowing ease of installation and maintenance with model types available in either standard or Auto Test/DALI version.

Features

- For warehouse, sort halls, commercial and industrial applications.
- Efficient and reliable LED light source
- Integral status indicator
- 3 hours emergency duration
- IP rating: IP65

Dimensions

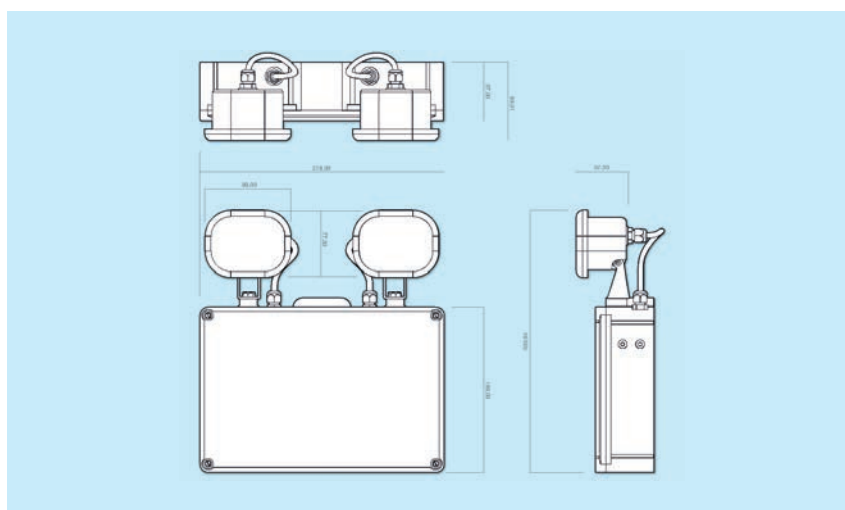

PNEX102

LED Emergency Light



Tech. Specification

Model	PNEX102
Emergency duration	3 hours
Recharge period	24 hours
Battery Charge Current	200MA
Supply Current (max)	40MA
Supply Voltage	230 V
Supply Frequency	50/60 Hz
Ambient Temp. (ta)	0° to 35+ C°
Max Case Temp.	70+ C°
Conductor Size	0.2 to 1.5 mm ²

Light Distribution

