

PNSF 303

LED Surface mounted



PAN
LIGHTING




Introduction

PNSF303 LED Surface mounted uses SMDs LED for indoor applications. Housing is made of high quality cold-roll steel with color powder coating. Luminaire is available with wide otion of diffusers.

Features

- High efficiency SMD LEDs
- LED driver
- Installation: Surface mounted.
- IP rating: IP54
- Life span: 50,000 hours

Dimintions

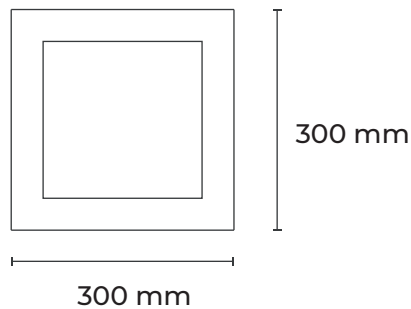

Tech. Specification

| Model | PNSF303-22 |
|-------------------------|----------------------|
| Power | 22W |
| LED Type | SMD |
| Luminous Flux | 1760lm |
| Color Temperature (CCT) | 3000 - 4000 - 6500 k |
| CRI (Ra) | >80 |
| Rated Supply Voltage | 220-240 V |
| Input Voltage | 100-260 VAC |
| Frequency | 50/60 Hz |